

## Designed Smart

### Maximum Versatility

- APW Wyott large capacity Heated Merchandising Cabinets hold wrapped or boxed products side-by-side on four slanted shelves for increased visibility and easy accessibility.
- Prepare food in advance of peak periods and place product straight from the oven into the full-view cabinets to increase impulse sales.
- Temperatures range from 80° to 180°F (27° to 88°C)

### APW Wyott Design Features

- Tempered glass doors and side panels provide maximum heat retention and allow for full cabinet display.
- Maintains proper serving temperature and keeps food at “just-made” taste and temperatures.
- Shatter-resistant incandescent lights enhance products display while safeguarding food products from bulb breakage.
- Easy to read thermometer for optimal temperature control.



### APW Wyott Design Features

- Powder coated outer skin.
- Heavy duty stainless steel door frames & hinges for years of reliable use.
- Four 60 Watt lights for increased product visibility.
- Multiple rack positions, shelf angle from 0 to 25°
- Thermostatically controlled with easy to read thermometer.

### Reliability backed by APW Wyott's Warranty

APW Wyott's Heated Display Cabinet is backed by a 1-year parts and labor warranty, including on-site service calls within 50 miles of authorized service technicians.

- Certified by the following agencies:




See reverse side for product specifications.

PRODUCT:



QUANTITY:

ITEM #:

**PRODUCT SPECIFICATIONS**

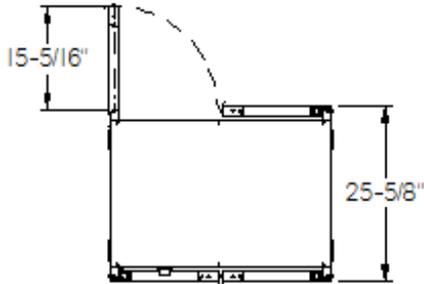

Model	WIDTH	DEPTH	HEIGHT
HDCFF3225	32-1/8"	25-5/8"	36-7/8"

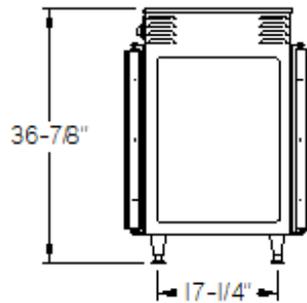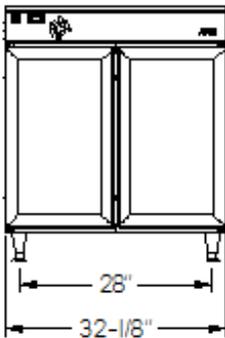

**Construction:**

Stainless steel or powder coated black exterior with heavy duty stainless steel doors. Tempered glass sides and door windows. Four adjustable wire racks for slanted or level display.

**Electrical Information:**

Each unit is equipped with at least a 66", three wire grounded power cord, which terminates with a standard three-pronged male plug. The U.S. 120V units utilize a NEMA 5-20P plug.

**Electrical Specifications:**

Model	Amps	Volts	Watts
HDCFF3225	15	120	1788

