

Stationary Models ST-2S ST-3S ST-4S ST-5S
 Portable Models PST-2S PST-3S PST-4S PST-5S
 ITEM:

PRODUCT:

QUANTITY:

Designed Smart

APW Hot Well Sealed Exposed Element Steam Tables constructed of stainless steel with die stamped top.

- Individual infinite switch heat controls; thermostatic also available
- Indicator light remains on while control is in ON position
- Standard with 500 watt elements; 750 watt elements also available
- Stainless steel liner is standard
- Each compartment insulated with 1" thick fiberglass
- ½" thick poly cutting board mounted on stainless steel shelf supported by stainless steel brackets
- Available with stainless steel legs and under shelf
- Cord and plug included with standard units



Model: ST-5

APW Wyott Design Features

Heavy gauge stainless steel construction for the body.

Features include:

- Poly cutting board
- Stainless steel undershelf & legs
- High-output tubular heating elements.
- Stationary and portable units available.
- UL and UL Sanitation approved
- Full range of options and accessories.
- Individual controls for peak performance
- Recessed controls for improved protection and safety

Reliability Backed by APW Wyott's Warranty

All APW Wyott cooking equipment is backed by a 1-year limited warranty and a 1-year on-site labor warrant. *

Certified by the following agencies:



Options and Accessories

Cutting Boards

- NSF approved Plastic Cutting Boards – 7 1/2" X 12"
- Hardwood – 8" X 1-1/4"
- Richlite Heat-Resistant – 8" X 12"

- Stainless Steel Dish Shelf
- Serving Shelves with Glass Protector
- Plate Shelves
- Tubular Tray Slide – 3-Bar
- Buffet Shelves
- Spillage Pans
- Adjustable Overall Shelf System
- Deluxe Serving Shelves
- Solid Tray Slide
- Roll top Covers
- Adapter Bars for Food Pans – 10" X 12"
- Adapter Tops for Round Inserts – 4-, 7-, and 11-Quart

Stationary Models ST-2 ST-2S ST-3 ST-3S ST-4 ST-4S ST-5 ST-5S
 Portable Models PST-2 PST-2S PST-3 PST-3S PST-4 PST-4S PST-5 PST-5S

PRODUCT SPECIFICATIONS

Construction:

All stainless steel wrapper. Individual controls for peak performance.

Freight Class: 100

FOB: Allen, TX 75013

Stationary


Non-Marking feet adjust unit height from 34 ½" to 35 ½".

| Dimensions | | | | | | |
|------------|-------------------|--------|---------|--------|--------|---------------------|
| Model | # of top openings | Length | Width | Height | Weight | Electrical Data |
| ST-120-2S | 2 | 30 ½" | 22 3/4" | 34" | 150 | 1000W, 120V, 8.33A |
| ST-208-2S | 2 | 30 ½" | 22 3/4" | 34" | 150 | 1500W, 208V, 7.21A |
| ST-240-2S | 2 | 30 ½" | 22 3/4" | 34" | 150 | 1500W, 240V, 6.25A |
| ST-120-3S | 3 | 44 ½" | 22 3/4" | 34" | 190 | 1500W, 120V, 12.5A |
| ST-208-3S | 3 | 44 ½" | 22 3/4" | 34" | 190 | 2250W, 208V, 10.82A |
| ST-240-3S | 3 | 44 ½" | 22 3/4" | 34" | 190 | 2250W, 240V, 9.38A |
| ST-120-4S | 4 | 58 ½" | 22 3/4" | 34" | 225 | 2000W, 120V, 16.67A |
| ST-208-4S | 4 | 58 ½" | 22 3/4" | 34" | 225 | 3000W, 208V, 14.42A |
| ST-240-4S | 4 | 58 ½" | 22 3/4" | 34" | 225 | 3000W, 240V, 12.5A |
| ST-120-5S | 5 | 72 ½" | 22 3/4" | 34" | 260 | 2500W, 120V, 20.83A |
| ST-208-5S | 5 | 72 ½" | 22 3/4" | 34" | 260 | 3750W, 208V, 18.03A |
| ST-240-5S | 5 | 72 ½" | 22 3/4" | 34" | 260 | 3750W, 240V, 15.63A |

Portable

Push handle and 4" – diameter casters, two with brake included

| Dimensions | | | | | | |
|------------|-------------------|--------|---------|--------|--------|---------------------|
| Model | # of top openings | Length | Width | Height | Weight | Electrical Data |
| PST-120-2S | 2 | 30 ½" | 22 3/4" | 34" | 150 | 1000W, 120V, 8.33A |
| PST-208-2S | 2 | 30 ½" | 22 3/4" | 34" | 150 | 1500W, 208V, 7.21A |
| PST-240-2S | 2 | 30 ½" | 22 3/4" | 34" | 150 | 1500W, 240V, 6.25A |
| PST-120-3S | 3 | 44 ½" | 22 3/4" | 34" | 190 | 1500W, 120V, 12.5A |
| PST-208-3S | 3 | 44 ½" | 22 3/4" | 34" | 190 | 2250W, 208V, 10.82A |
| PST-240-3S | 3 | 44 ½" | 22 3/4" | 34" | 190 | 2250W, 240V, 9.38A |
| PST-120-4S | 4 | 58 ½" | 22 3/4" | 34" | 225 | 2000W, 120V, 16.67A |
| PST-208-4S | 4 | 58 ½" | 22 3/4" | 34" | 225 | 3000W, 208V, 14.42A |
| PST-240-4S | 4 | 58 ½" | 22 3/4" | 34" | 225 | 3000W, 240V, 12.5A |
| PST-120-5S | 5 | 72 ½" | 22 3/4" | 34" | 260 | 2500W, 120V, 20.83A |
| PST-208-5S | 5 | 72 ½" | 22 3/4" | 34" | 260 | 3750W, 208V, 18.03A |
| PST-240-5S | 5 | 72 ½" | 22 3/4" | 34" | 260 | 3750W, 240V, 15.63A |

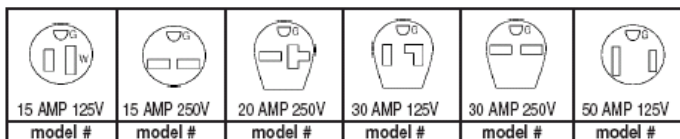

| | | | | | |
|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|
| furnished with NEMA 5-15 plug | furnished with NEMA 6-15 plug | furnished with NEMA 6-20 plug | furnished with NEMA 5-30 plug | furnished with NEMA 6-30 plug | furnished with NEMA 5-50 plug |
|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|

*APW Wyott reserves the right to modify specifications or discontinue models without incurring obligation.